



Exit & Panic Devices

Reversible rim type touch bar exit devices feature deadlatching, and are non-handed (right or left opening), and easily installed. Hex key dogging is used, and the devices are available with exterior access accessories such as ball or lever keyed locks. Each unit is packed with a rim strike, shim and a complete kit of fasteners, including mounting templates and easy to follow instructions. The units are also Underwriter Laboratories listed and several are 1½ hour fire rated.




Hand of Door:

The Hand of Doors, including double acting, is determined from the Outside or Lock Side of the door to which it is applied. If standing outside, the door Opens From you it is a Regular Bevel door, if Opening Toward you, it is a reverse bevel door.

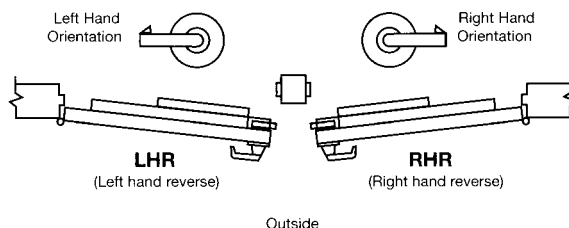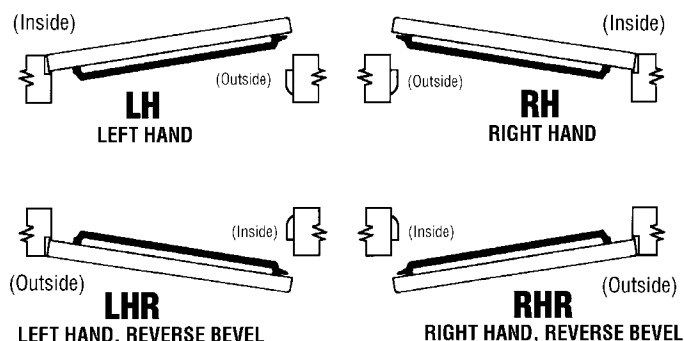


Single Door




Vertical Rod type or Rim type. Surface applied 2 point lock. Surface application

Pair Doors Opening Same Direction




2 Vertical Rod type. Surface applied 2 point locking both doors. Each door active same direction. Do not use with overlapping astragal.

Pairs of Doors with Mullion




2 Horizontal type with Mullion. Two independent doors with full double door openings when required. Same direction.

Pairs of Doors without Mullion



1 Vertical Rod and 1 Rim type. Both devices are surface applied. A coordinator and overlapping strike is recommended.

Pair Doors Opening Opposite Direction



2 Vertical Rod type. Double egress surface applied. 2 point locking both doors opposite directions.

520 Series Exit Device


**GRADE
1**



ANSI Grade 1 Reversible Rim Type

Horizontal reversible, rim type touch bar exit devices UL and KUL 520 series fit a 36" to 48" wide door, and can be used with a cylinder, keyed ball knob, or keyed lever, or a pull. Available in aluminum, or duranodic finishes. The UL520 devices are packed with latch and strike filler plates. Available in aluminum, and duranodic finishes may also be used with a cylinder, key ball knob, keyed lever, thumb piece trim, passage function trim, or a pull with rim cylinder.

- Deadlatching
- Non-handed for use on right or left opening doors
- Easy to install new or replacement
- Complete with rim strike latch, shim, fasteners, mounting templates and easy to follow instructions
- Vertical panic device for double door installations
- Vertical unit can be cut to size.
- Vertical Touch Bar is used with the UL520 horizontal device.
- Doggable

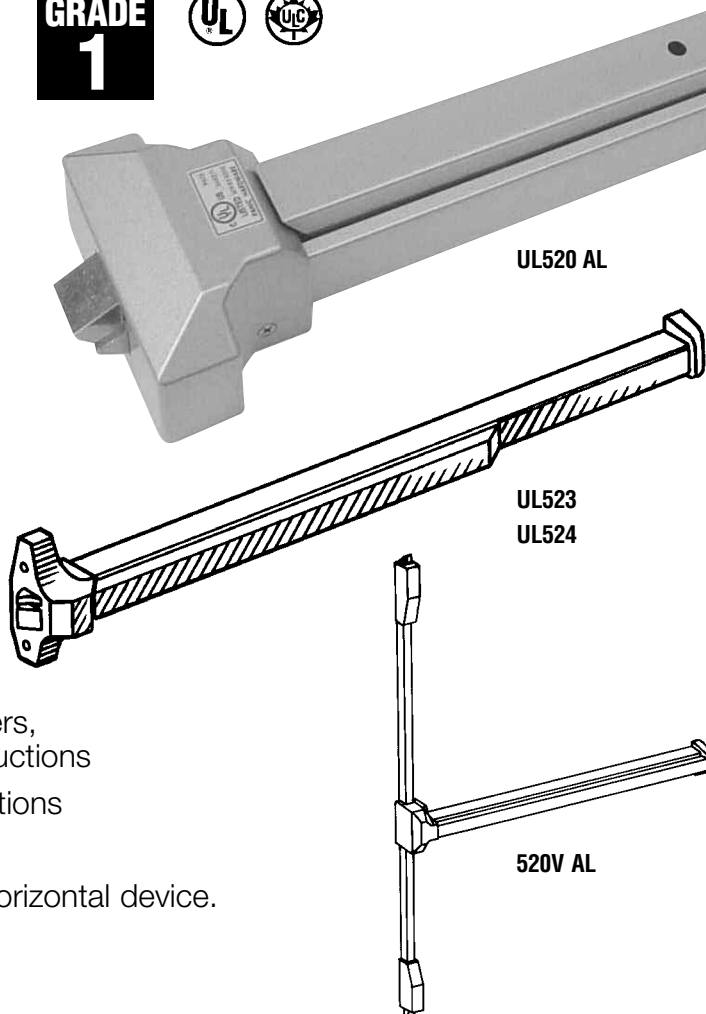

Contractor Quality® Touch Bar Panic Devices

Product Number	Description
Rim, Reversible Panic Device	
UL520 AL - Grade 1	Aluminum Finish Adjustable for Doors 25"-36" Wide
UL520AL48 - Grade 1	Aluminum Finish Adjustable for Doors 25"-48" wide (can be cut)
UL520 DUR - Grade 1	Duranodic Finish Adjustable for Doors 25"-36" Wide
UL520 PB - Grade 1	Polished Brass Finish Adjustable for Doors 25"-36" Wide
UL520 DCH - Grade 1	Dull Chrome Finish Adjustable for Doors 25"-36" Wide
UL520SB - Grade 1	Satin Brass Finish for Doors 25"-36" Wide
SUL520AL - Grade 1	Aluminum Finish adjustable for Doors 25"-36" Wide with sex bolts
SUL518AL - Grade 1	Aluminum Finish adjustable for Doors 25"-36", UL Panic less dead latch with sex bolts
UL523 AL	Aluminum Finish for Doors 25"-36" Wide — 2/3 Push Bar Length
UL523 DUR	Duranodic Finish for Doors 25"-36" Wide — 2/3 Push Bar Length
UL524 AL	Aluminum Finish for Doors 25"-48" Wide — 2/3 Push Bar Length
UL524 DUR	Duranodic Finish for Doors 25"-48" Wide — 2/3 Push Bar Length

Panic Device and Keyed Ball Knob

- KUL520 AL - Grade 1 Aluminum Finish with Ball Knob Lockset Packed Together
 SKUL520AL - Grade 1 Aluminum Finish with Ball Knob Lockset Packed Together and sex bolts

Vertical Touch Bar Fits 8' Standard Door

- 520V AL - Grade 1 Aluminum Finish for Double Door Installation
 520V DUR - Grade 1 Duranodic Finish for Double Door Installation
 520V PB - Grade 1 Polished Brass Finish for Double Door Installation
 520V DCH - Grade 1 Dull Chrome Finish for Double Door Installation
 520V SB - Grade 1 Satin Brass Finish for Double Door Installation
 520V RC - Grade 1 Rod Extenders to fit Doors up to 10'